



BID BULLETIN

PhilGEPS Reference No.: **12226050**

Purchase Request No.: **PR 25-06-309 INF**

Project Name: **Renovation of University Health Services Center with Provision for Furnitures and Fixtures (ABC: PHP 7,903,075.56)**


Date: **August 7, 2025**

The Bid Bulletin is issued to modify and/or amend items in the Invitation to Bid and Bidding documents. Please take note of the clarifications for the Project.

- In the PhilGEPS Invitation to Bid, Philippine Bidding Documents (PBD's) Invitation to Bid (ITB) item #2 and Bill of Quantities Contract Duration is amended from **180 Calendar Days to 280 Calendar Days**. Please see attached amended Bill of Quantities.
- In the Bill of Quantities item 1201(9)a – Overhead Tank the quantity is modified from **4 set to 2 set**.
- Sheet# 34 & Sheet #46 of the drawing plans is modified to **omit** the brand name from Overhead Tanks Perspectives and 2-Seater Sofa respectively. Please see attached amended Sheet# 34 & #46
- Sheet# 64 of the drawing plans is modified to **omit** the Lead Water Tank Model and Size Chart. Please see attached amended Sheet# 64
- Winning Bidder shall secure the necessary Building Permit from the Office of the Building Official (OBO) of Zamboanga City.

For further inquiries, you may coordinate with the Bids and Awards Committee Secretariat at Tel. No. (062) 991-1771 loc 1002.

Please be guided accordingly.

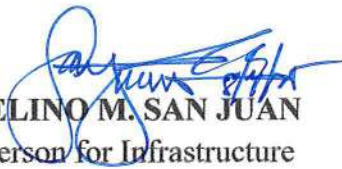
DR. FREDELINO M. SAN JUAN
BAC Chairperson for Infrastructure



Republic of the Philippines
WESTERN MINDANAO STATE UNIVERSITY
PHYSICAL PLANT AND ENGINEERING SERVICES
Zamboanga City



Contract Name:

RENOVATION OF UNIVERSITY HEALTH SERVICES CENTER WITH PROVISION FOR FURNITURES AND FIXTURES

Location:

WMSU LOT B, NORMAL ROAD BALIWASAN, ZAMBOANGA CITY

Project Duration:

280 CALENDAR DAYS

BILL OF QUANTITIES

Item No./ Description	Quantity	Unit	Unit Cost	Amount
B	GENERAL REQUIREMENTS			
B.5	Project Billboard / Signboard	1	ea	
B.7	Occupational Safety and Health Program	1	l.s	
B.9	Mobilization / Demobilization	1	l.s	
B.20	Site Temporary Fence	1	l.s	
ITEM 801	REMOVAL OF STRUCTURES AND OBSTRUCTIONS			
801(2)	Removal of Actual Structures/Obstruction	1	l.s	
ITEM 803	STRUCTURE EXCAVATION			
803(1)b	Structure Excavation	65.46	cu.m	
ITEM 804	EMBANKMENT			
804(4)	Gravel Fill	1.20	cu.m	
ITEM 900	REINFORCED CONCRETE			
900(1)c1	Structural Concrete (28 days)	18.12	cu.m	
ITEM 901	PLAIN / LEAN CONCRETE			
901(1)	Plain Concrete	8.07	cu.m	
ITEM 902	REINFORCING STEEL			
902(1)a	Reinforcing Steel (Deformed) Grade 40	816.75	kg	
902(1)b	Reinforcing Steel (Deformed) Grade 60	1010.96	kg	
ITEM 903	FORMWORKS AND FALSEWORKS			
903(2)	Forms and Falseworks	141.55	sq.m	
ITEM 1000	TERMITE CONTROL WORK			
1000(1)	Soil Poisoning	5	Liter	
ITEM 1001	STORM DRAINAGE AND SEWERAGE SYSTEM			
1001(1)a1-a11	PVC Pipes and Fittings (50-300mm Ø Series 1000)	1	l.s	
1001(5)b	Catch Basin (CHB)	6	ea	
ITEM 1002	PLUMBING WORKS			
1002(2)	Polypropylene Random Copolymer (PPR-C) Pipes with Fittings 20-50mm) PN20	1	l.s	
1002(5)a	Water Closet, Elongated, Complete (Tank Type)	4	Set	
1002(11)a	Kitchen Sink, Complete (Stainless)	4	Set	
1002(14)a	Lavatory, Wall Hung, Complete	6	Set	

1002(16)a3	Floor Drain Plates (Stainless)	5	Set		
1002(17)	Bidet	4	pcs		
1002(19)	Shower Head	1	Set		
1002(22)	Hose Bibb	3	pcs		
1002(26)	Cistern	2	set		
ITEM 1003	CARPENTRY AND JOINERY WORKS				
1003(1)a1	Ceiling - 4.5 mm - Metal Frame - Fiber Cement Board	215	sq.m		
1003(1)g2	PVC Cladding with Metal Frame	26.12	sq.m		
1003(2)a1	Wall 4.5 mm - Metal Frame - Fiber Cement Board	32	sq.m		
1003(3)	Cabinets	1	l.s		
1003(7)	Wood Flooring	8.9	sq.m.		
1003(12)	Fascia Board - Metal	20	sq.m		
ITEM 1006	STEEL DOORS AND FRAMES				
1006(3)	Grille Door	1	l.s		
1006(5)	Fire Rated Fire Exit Steel Door	1	l.s		
ITEM 1007	ALUMINUM FRAMED GLASS DOORS				
1007(1)b	Aluminum Framed Glass Door (Swing Type)	1	l.s		
ITEM 1008	ALUMINUM GLASS WINDOWS				
1008(1)a	Aluminum Glass Windows (Sliding Type)	1	l.s		
1008(1)c	Aluminum Glass Windows (Awning Type)	1	l.s		
1008(1)d	Aluminum Glass Windows (Fixed Type)	1	l.s		
ITEM 1010	WOODEN DOORS AND WINDOWS				
1010(2)b	Doors (Wood Panel)	1	l.s		
ITEM 1013	CORRUGATED METAL ROOFING				
1013 (2)b1	Fabricated Metal Roofing Accessory (Gutter, Gauge 24)	58.68	l.m		
ITEM 1014	PREPAINTED METAL SHEETS				
1014(1)b2	Prepainted Metal Sheets - above 0.427 mm - Rib Type - Long Span	180.00	sq.m		
ITEM 1016	WATERPROOFING				
1016(1)b	Waterproofing - Liquid	12.96	sq.m		
ITEM 1018	CERAMIC / GRANITE TILES				
1018(1)	Glazed Tiles and Trims	302.00	sq.m		
1018(2)	Unglazed Tiles	25.05	sq.m		
1018(3)	Granite Tiles (For countertop)	1	l.s		
ITEM 1021	CEMENT FLOOR FINISH				
1021(13)	Blister Type Tactile Paver	1	l.s		
ITEM 1027	CEMENT PLASTER FINISH / DECORATIVE STONE				
1027(1)	Cement Plaster Finish (2 Face)	117.77	sq.m		
1027(3)	Decorative Stone (Bricks)	130.95	sq.m		
ITEM 1030	ACOUSTICAL CEILING				
1030 (1)	Acoustical Ceiling Panel	52.84	sq.m		
ITEM 1032	PAINTING, VARNISHING AND OTHER RELATED WORKS				
1032(1)a	Painting Works (Masonry/Concrete)	1262.00	sq.m		
1032(2)b	Painting Works (Wood)	171.08	sq.m		

1032(3)c	Painting Works (Steel)	103.00	sq.m		
ITEM 1036	POLYCARBONATE SHEETS / PANELS				
1036(1)a	Polycarbonate (Sheets)	17.71	sq.m		
ITEM 1038	REFLECTIVE INSULATION				
1038(1)	Reflective Insulation	135.00	sq.m		
ITEM 1039	ALUMINUM CLADDING				
1039(1)	Aluminum Cladding	22	sq.m		
ITEM 1043	PVC DOORS AND FRAMES				
1043(1)	PVC Doors and Frames	1	l.s		
ITEM 1046	MASONRY WORKS				
1046(2)a1	CHB Load Bearing (including Reinforcing Steel) - 100 mm	113.87	sq.m		
1046(2)a2	CHB Load Bearing (including Reinforcing Steel) - 150 mm	3.91	sq.m		
ITEM 1047	METAL STRUCTURES				
1047(1)	Structural Steel (Metal Fire Exit Staircase)	1	l.s		
1047 (1)a	Structural Steel (Ladder with Safety Cage)	1	l.s		
1047(2)a	Structural Steel Roof Trusses	1	l.s		
1047(10)	Metal Structure Accessories	1	l.s		
ITEM 1051	RAILINGS				
1051(2)c	Concrete Railing (Parapet)	1	l.s		
1051 (5)	Metal Railing	7.08	m		
ITEM 1100	CONDUITS, BOXES, & FITTINGS (CONDUIT WORKS/CONDUIT ROUGH-IN)				
1100 (10)	Conduits, Boxes & Fittings (Conduit Works/Conduit Rough-In)	1.00	l.s		
ITEM 1101	WIRES AND WIRING DEVICES				
1101 (33)	Wires and Wiring Devices	1	l.s		
ITEM 1102	POWER LOAD CENTER, SWITCHGEAR AND PANELBOARDS, AND OTHER OVERCURRENT PROTECTION DEVICES				
1102 (1)	Panel Board with Main and Branch Breakers	1	l.s		
ITEM 1103	LIGHTING FIXTURES AND LAMPS				
1103(1)	Lighting Fixtures and Lamps	1	l.s		
ITEM 1104	AUXILIARY SYSTEM				
1104(1)	Auxiliary System	1	l.s		
ITEM 1106	CCTV SYSTEM				
1106(1)	CCTV System	1	l.s		
ITEM 1201	WATER PUMPING SYSTEM				
1201(1)	Water Pumping System	1	set		
1201(9)a	Overhead Tank (Stainless)	2	set		
ITEM 1705	FILL AND BACKFILL				
1705(1)	Fill and Backfil	24.07	cu.m		




ITEM 1728	SUPPLY AND DELIVERY				
1728(1)a	Supply and Delivery of Table	1	set		
1728(2)a	Supply and Delivery of Chairs	1	l.s		
1728(2)b	Supply and Delivery of Sofa	2	sets		
1728(5)a	Supply and Built-up Signages	1	l.s		
1728(8)	Supply and Delivery of Hospital Beds	3	sets		
Total:		(In Words):			
		(In Figure):	P -		

Submitted by:

Name & Signature of Bidder's Representative

Position

Name of Firm

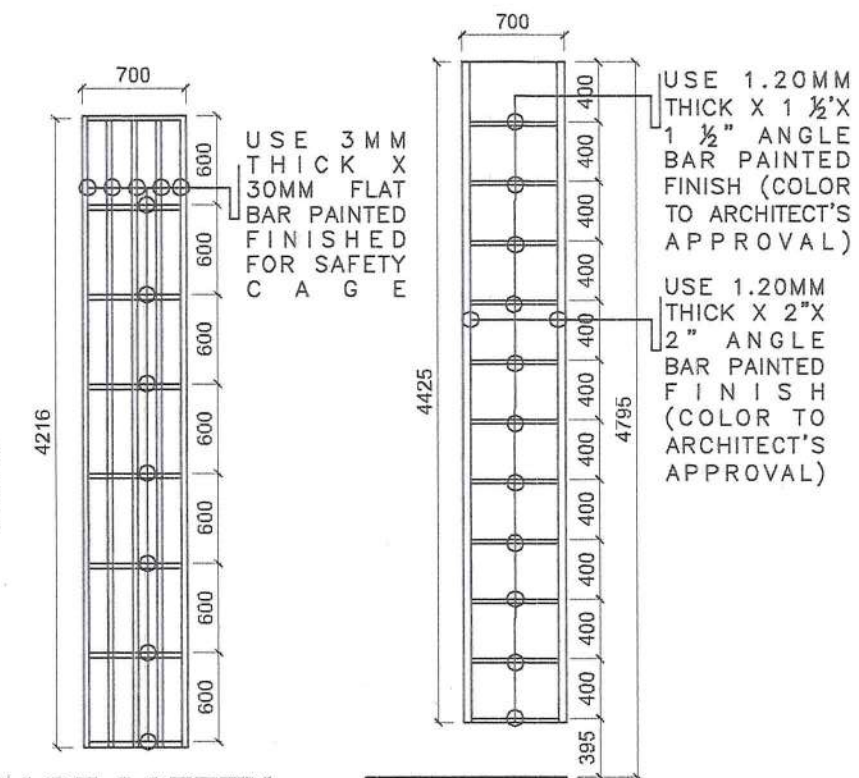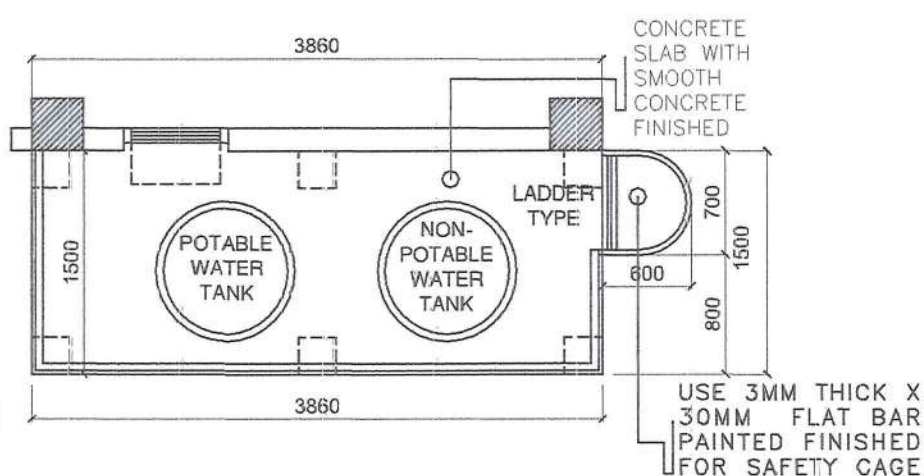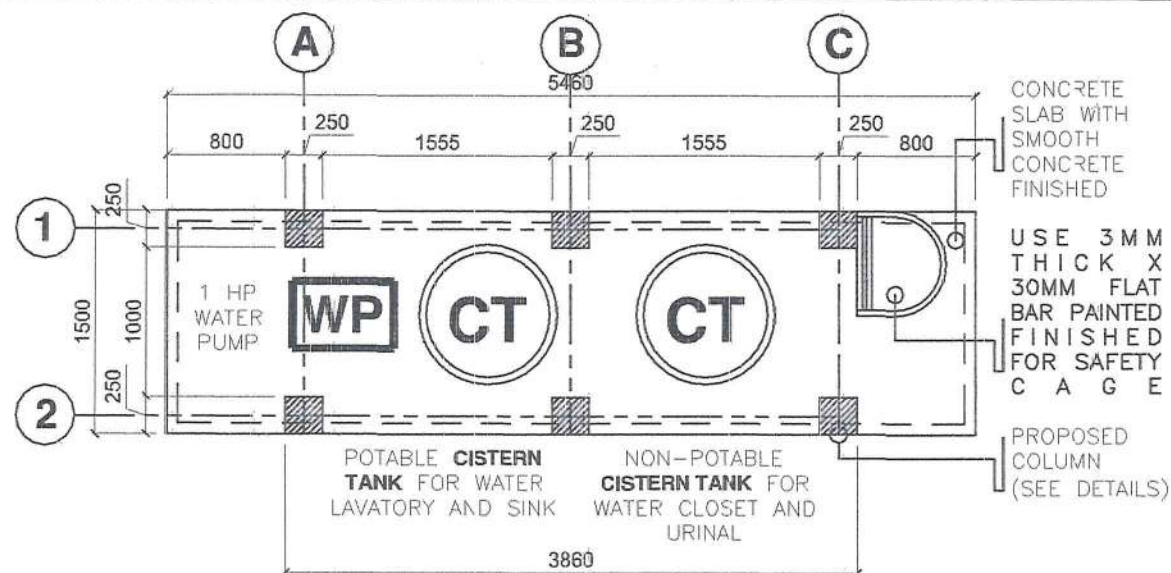

GROUND FLOOR OVERHEAD TANK PLAN

SCALE

1:50


USE 1.0MM THICK X 2" X 3" TUBULAR PAINTED FINISH (COLOR TO ARCHITECT'S APPROVAL)

USE 1.0MM THICK X 1" X 1" SQUARE TUBE PAINTED FINISH SPACED @ 125MM O.C. B.W. (COLOR TO ARCHITECT'S APPROVAL)

USE 3MM THICK X 30MM FLAT BAR PAINTED FINISHED FOR SAFETY CAGE

USE 1.20MM THICK X 1 1/2" X 1 1/2" ANGLE BAR PAINTED FINISH (COLOR TO ARCHITECT'S APPROVAL)

USE 1.20MM THICK X 2" X 2" ANGLE BAR PAINTED FINISH (COLOR TO ARCHITECT'S APPROVAL)

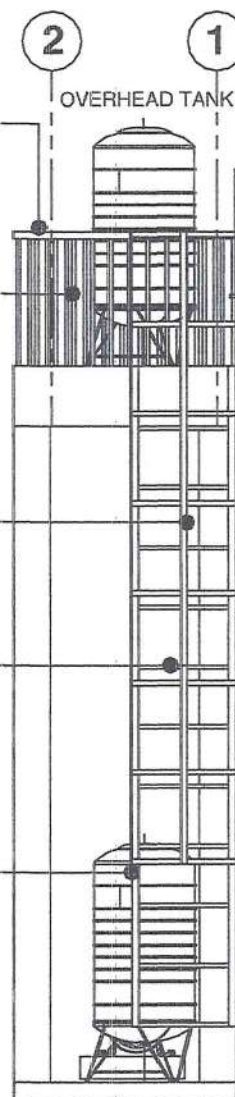

SIDE ELEVATION

1000L STAINLESS STEEL #304 OVERHEAD TANK, STAINLESS STEEL FLOAT VALVE SWITCH (POTABLE WATER) FOR LAVATORY AND SINK

USE 1.0MM THICK X 2" X 3" TUBULAR PAINTED FINISH (COLOR TO ARCHITECT'S APPROVAL)


USE 1.0MM THICK X 1" X 1" SQUARE TUBE PAINTED FINISH SPACED @ 125MM O.C. B.W. (COLOR TO ARCHITECT'S APPROVAL)

PROPOSED COLUMNS AND BEAMS PAINTED FINISHED (COLOR TO ARCHITECT'S APPROVAL)

EXISTING CTE KIOSK FENCE HEIGHT

USE 3MM THICK X 30MM FLAT BAR PAINTED FINISHED FOR SAFETY CAGE

CONCRETE SLAB WITH SMOOTH CONCRETE FINISHED

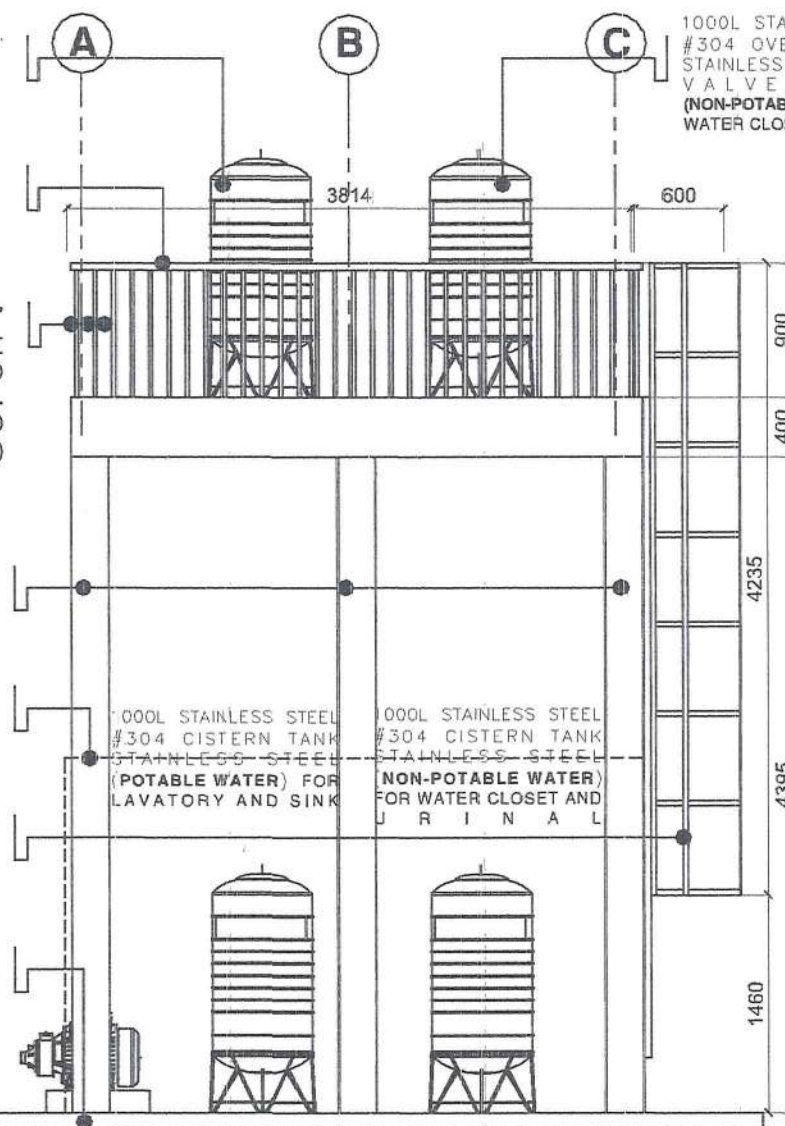

FRONT ELEVATION


CAGE SAFETY ELEVATION

LADDER ELEVATION



OVERHEAD TANK PERSPECTIVES

DESIGNED BY: ARCH. JOSEPH ANDREW L. SAHIA, UAP UNIVERSITY ARCHITECT PRC: 0010577 PTR: 2929291 TIN: 445-013-228	PROJECT TITLE: RENOVATION OF UNIVERSITY HEALTH SERVICES CENTER WITH PROVISION FOR FURNITURES AND FIXTURES LOCATION: WMSU, CAMPUS A, NORMAL ROAD, BAL WASAN ZAMBOANGA CITY	REQUISITIONER DR. FELICITAS ASUNCION C. ELAGO MEDICAL OFFICER III	RECOMMENDING APPROVAL ARCH. JOSEPH ANDREW L. SAHIA, UAP DIRECTOR OF PHYSICAL PLANT AND ENGINEERING SERVICES PRC: 0010577 PTR: 2929291 TIN: 445-013-228	RECOMMENDING APPROVAL DR. JOSE LITO D. MADROÑAL VICE PRESIDENT FOR ADMIN AND FINANCE	APPROVED BY: DR. MA. CARLA A. OCHOTORENA WMSU-PRESIDENT	SHEET CONTENTS OVERHEAD TANK DETAILS DRAFTED BY: AR. RVS	SHEET NO. A34 3487	STARS WURI
--	--	--	--	---	--	--	---	--------------------------

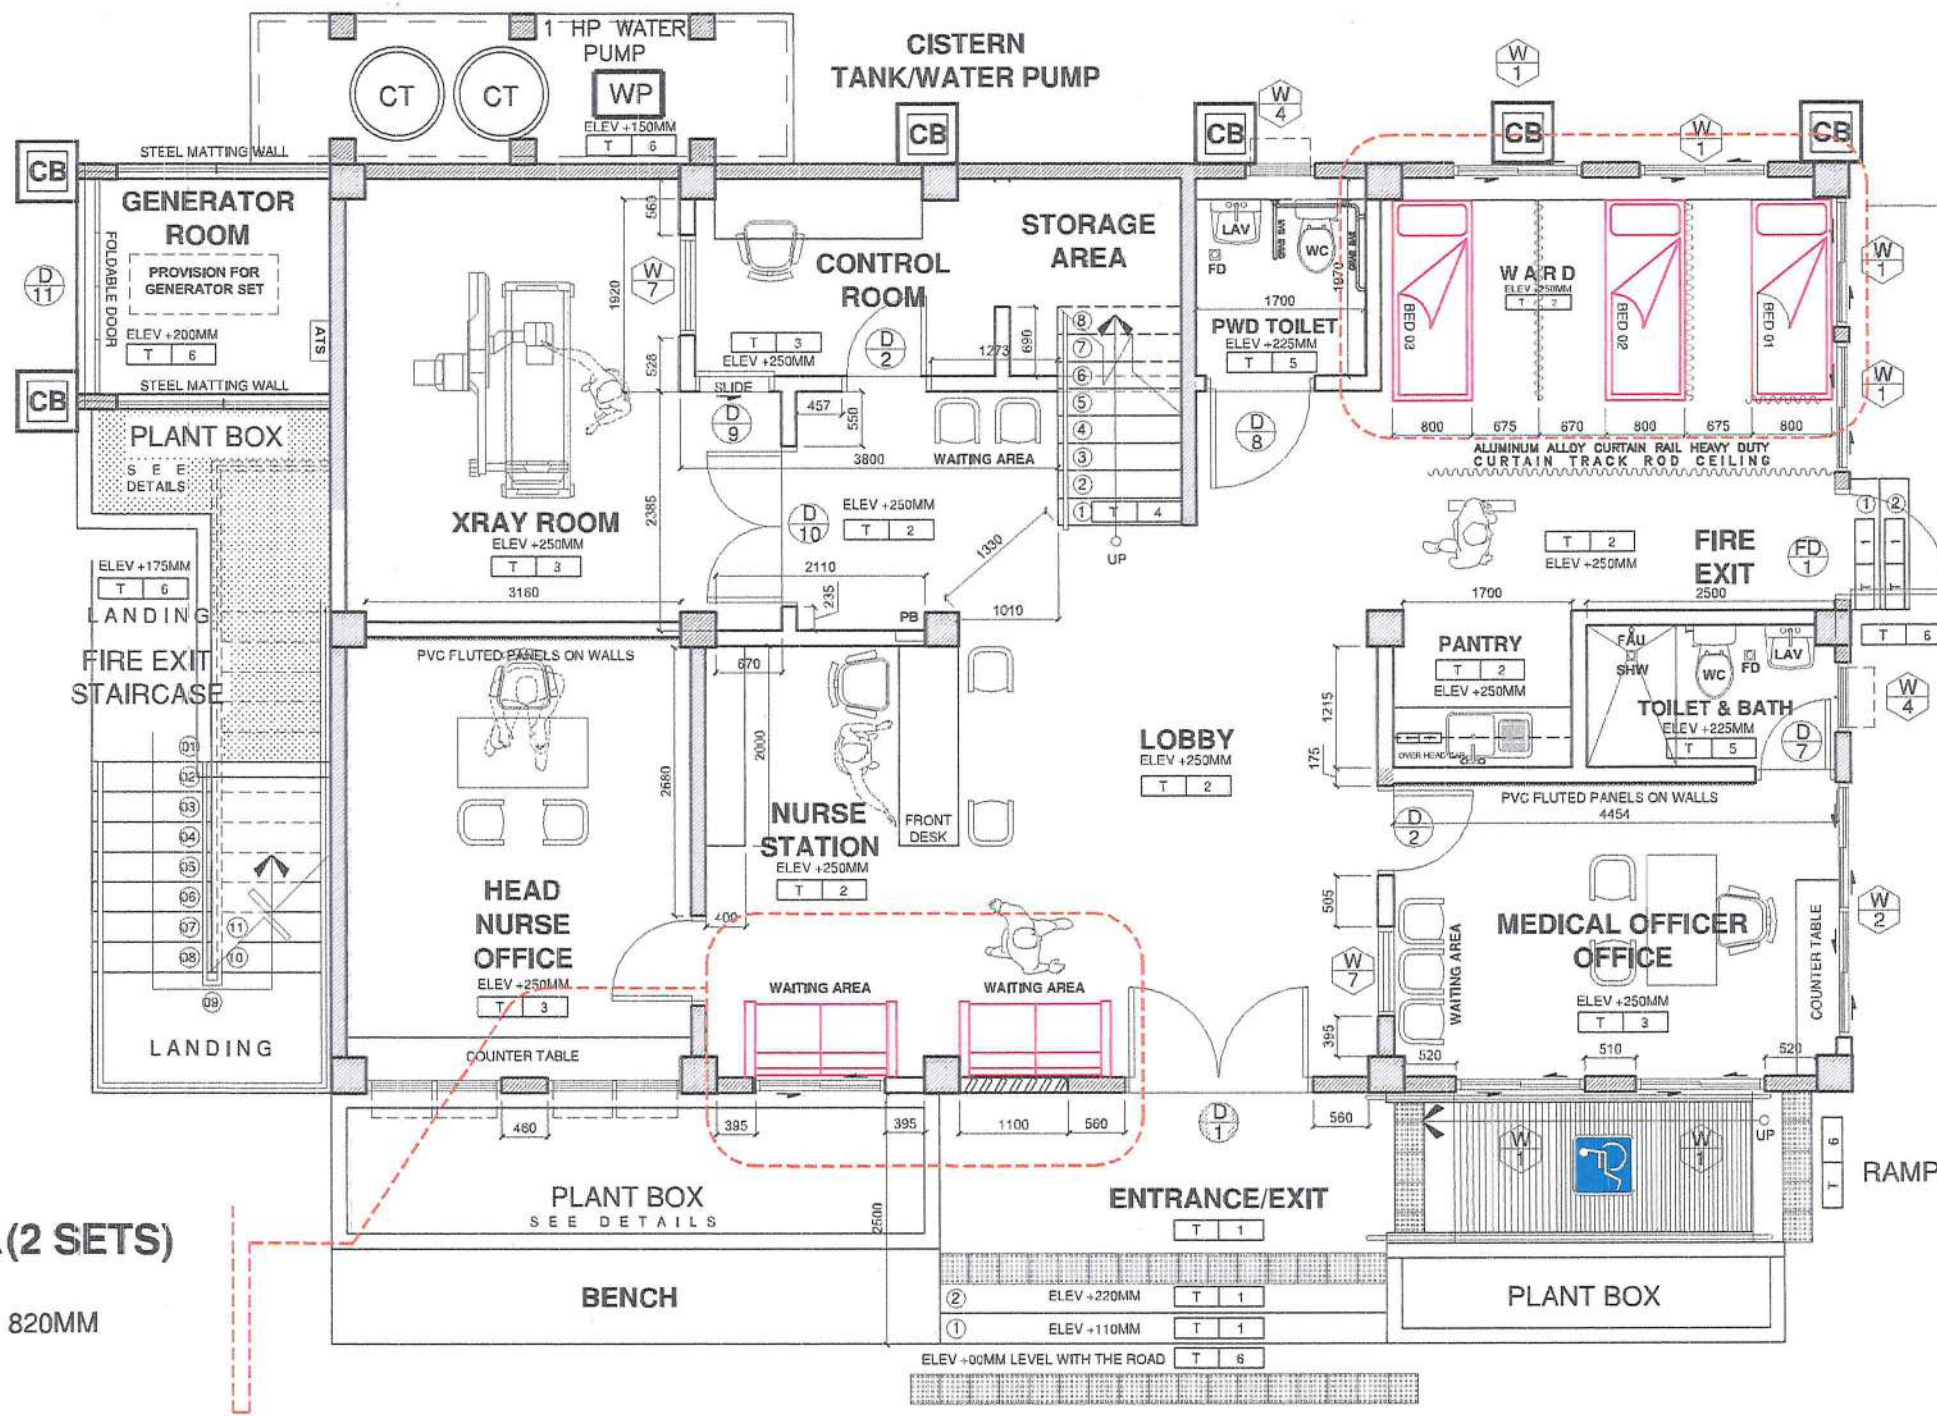

MEDICAL BED

SPECS:

- 1900MM X 900MM X 500MM
- ALUMINUM ALLOY SIDE RAIL, COLLAPSED TYPE WITH SAFE LOCK
- BED FRAMEWORK MADE FROM MILD STEEL ERW RECTANGULAR TUBES.
- ABS HEAD & FOOT BOARDS CAN BE REMOVABLE
- ADJUSTABLE IN TWO POSITION (UPPER TORSO AND LEGS)

SEATER SOFA(2 SETS)


SPECS:

- 1490MM X 790MM X 820MM
- FABRIC



GROUND FLOOR FURNITURE

SCALE 1:100


 DESIGNED BY: ARCH. JOSEPH ANDREW L. SAHIAL, UAP UNIVERSITY ARCHITECT	PROJECT TITLE: RENOVATION OF UNIVERSITY HEALTH SERVICES CENTER WITH PROVISION FOR FURNITURES AND FIXTURES	REQUISITIONER DR. FELICITAS ASUNCION C. ELAGO MEDICAL OFFICER III	RECOMMENDING APPROVAL ARCH. JOSEPH ANDREW L. SAHIAL, UAP DIRECTOR OF PHYSICAL PLANT AND ENGINEERING SERVICES	RECOMMENDING APPROVAL DR. JOSELITO D. MADRONAL VICE PRESIDENT FOR ADMIN AND FINANCE	APPROVED BY: DR. MA. CARLA A. OCHOTORENA MSU-PRESIDENT	SHEET CONTENTS • Ground Floor Furniture	SHEET NO. A46 4687	
PRC: 0010577 PTR: 2929291 TIN: 445-013-228	LOCATION: WMSU, CAMPUS A, NORMAL ROAD, BALIWASAN ZAMBOANGA CITY		PRC: 0010577 PTR: 2929291 TIN: 445-013-228			DRAFTED BY: AR. RVS		

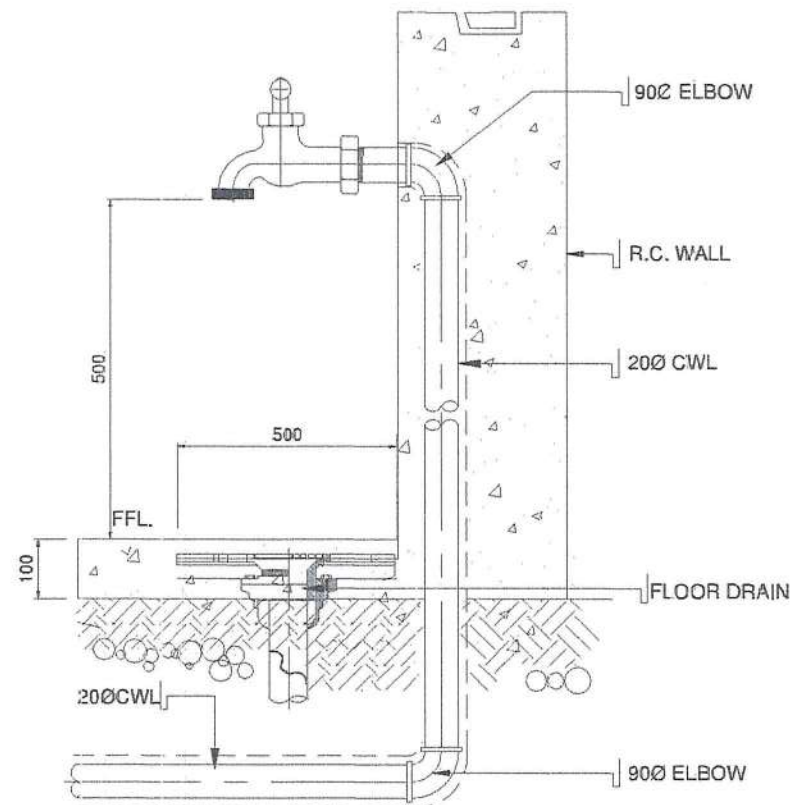


FAUCET DETAIL
NOT TO SCALE

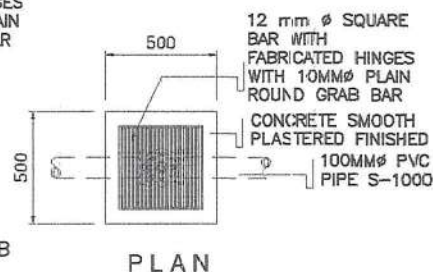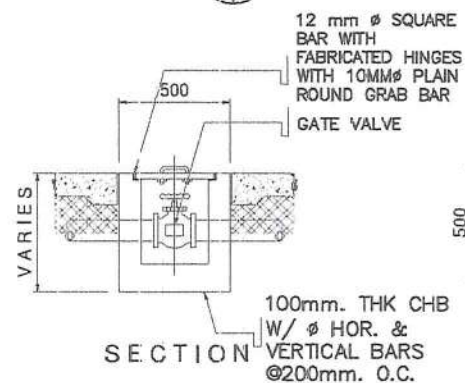


VALVE BOX DETAIL
NOT TO SCALE

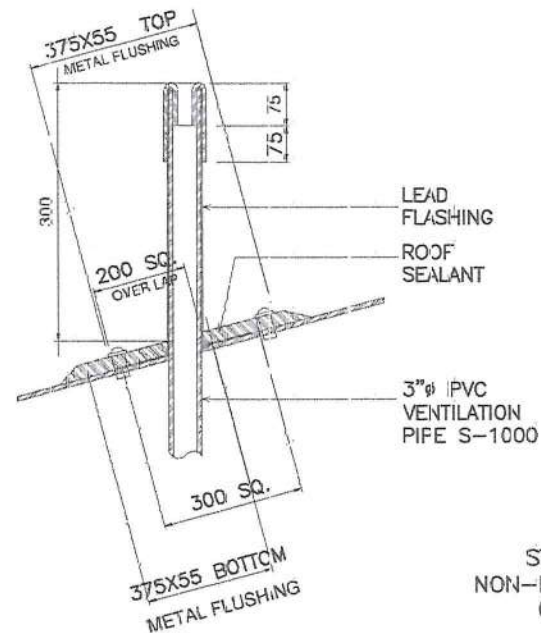


VENT THRU ROOF DETAIL
NOT TO SCALE

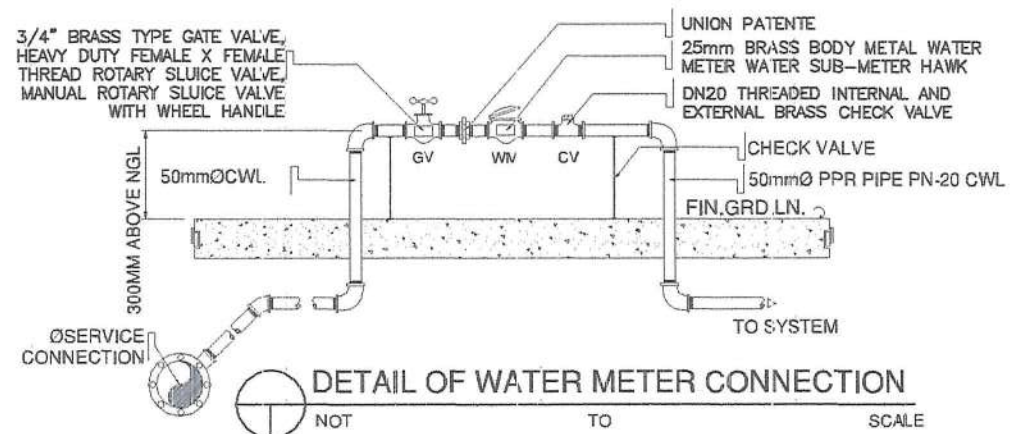

DETAIL OF WATER METER CONNECTION
NOT TO SCALE

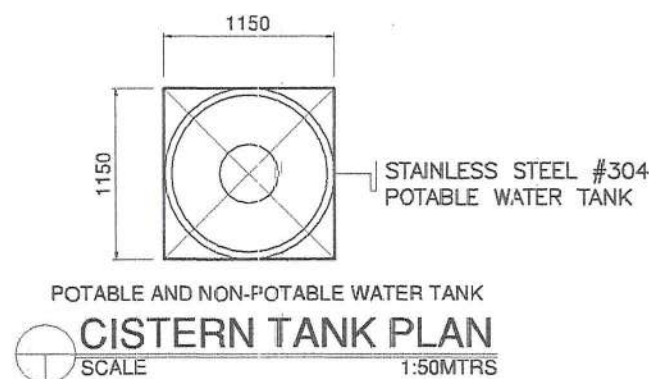

CISTERN TANK PLAN
SCALE 1:50MTRS

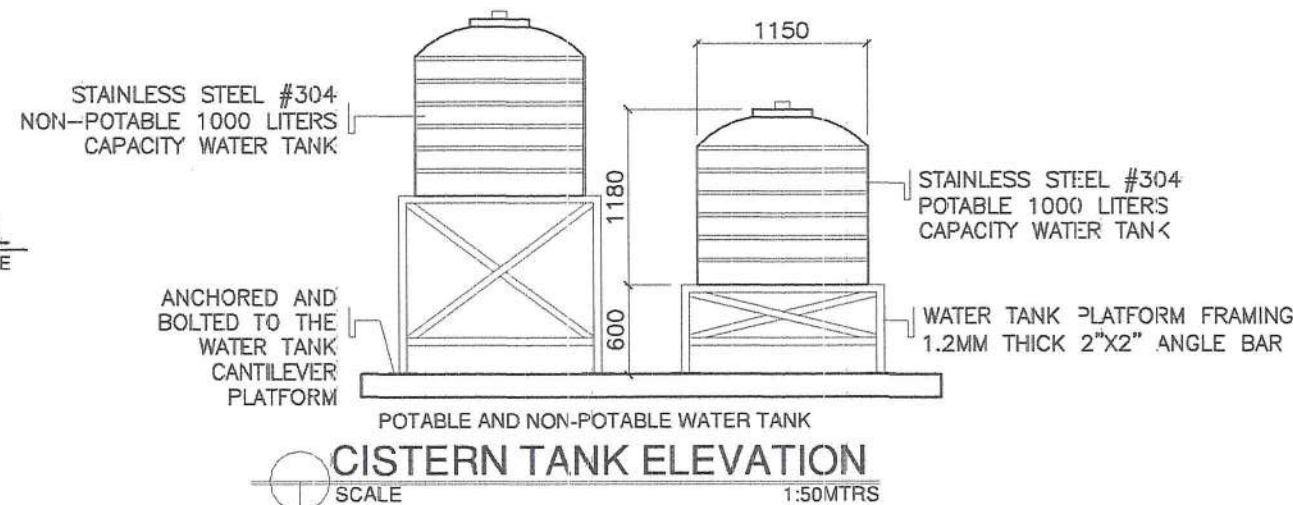

CISTERN TANK ELEVATION
SCALE 1:50MTRS

	DESIGNED BY: ENGR. LIZAMYL R. LAPING SANITARY ENGINEER	PROJECT TITLE: RENOVATION OF UNIVERSITY HEALTH SERVICES CENTER WITH PROVISION FOR FURNITURES AND FIXTURES	REQUISITIONER DR. FELICITAS ASUNCION C. ELAGO MEDICAL OFFICER III	RECOMMENDING APPROVAL ARCH. JOSEPH ANDREW L. SAHIAL, UAP DIRECTOR OF PHYSICAL PLANT AND ENGINEERING SERVICES	RECOMMENDING APPROVAL DR. JOSEITO D. MADROÑAL VICE PRESIDENT FOR ADMIN AND FINANCE	APPROVED BY: DR. MA. CARLINA A. OCHOTORENA WMSU-PRESIDENT	SHEET CONTENTS WATER TANK DETAILS VENT THRU ROOF DRAFTED BY: AR, RVS	SHEET NO. P04 6487	
PRC: 0002791 PTR: 2929291 TIN: 932-210-346	LOCATION: WMSU, CAMPUS A, NORMAL ROAD, BALIWASAN ZAMBOANGA CITY			PRC: 0010577 PTR: 2929291 TIN: 445-013-228					